

Series SUPREME CONTINENTAL



TECHNICAL PARAMETERS


MODEL	CH-S09FTXAL-* (I)		CH-S12FTXAL-* (I)		CH-S18FTXAL-* (I)		CH-S24FTXAL-* (I)	
Capacity	Cooling	kW	2.70	3.50	5.30	7.00		
	Heating	kW	2.93	3.81	5.57	7.20		
Power supply		~220-240V/50Hz/1 Ph						
Liquid pipeline diameter	mm/inch	6.35/1/4"		6.35/1/4"		6.35/1/4"		6.35/1/4"
Gas pipeline diameter	mm/inch	9.52/3/8"		9.52/3/8"		12.7/1/2"		15.88/5/8"
Air flow volume	m ³ /h	390/420/450/490/540/590/660		390/420/450/490/540/590/680		306/520/580/610/750/800/850		750/850/900/950/1000/1100/1250
Sound pressure level	dB (A)	18/22/26/35/37/39/41		19/24/28/35/37/39/43		30/33/36/41/43/45/49		32/35/38/42/44/47/49
Dehumidification	l/h	0.8		1.4		1.8		2.4
Weight	kg	10.5		11		13.5		16.5

performance in four different color types: white(WP), silver(SC), gold(GD), full-black(FB)

FUNCTION

HEALTH					COMFORT MANAGEMENT									
Mode SLEEP	Technology CH 7-SKY	ECO-FRESH	CH SMART-ION Filter	Locking the remote control	Timer	LED display	Turbo mode	Multi speed fan	SWING mode	Dehumidification mode	Self-clean	Wi-Fi	I FEEL	

DIMENSIONS

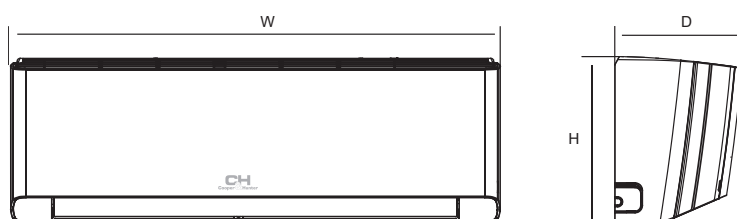

MODEL	W (mm)	H (mm)	D (mm)
CH-S09FTXAL-GD/SC/BL/WP/FB (I)	865	290	210
CH-S12FTXAL-GD/SC/BL/WP/FB (I)	865	290	210
CH-S18FTXAL-GD/SC/BL/WP/FB (I)	996	301	225
CH-S24FTXAL-GD/SC/BL/WP/FB (I)	1101	327	249