


SUPREME Continental Series



Accessories (optional)



Wired Controller
XK76



Wired Controller
CE58-00/EF(CM)



Wired Controller
CE52-24/F



Detection Control Board
MK010

Health Features

- ECO Fresh technology
- CH 7 Sky technology
- X-Fan function
- CH-UV technology
- Double Self Clean technology

Control Features


- Wi-Fi
- Remote Control
- Locking Remote Control
- Daily timer
- Connection to wired controller
- Connection to BMS
- Dry Contact

Comfort Features

- Cooling Mode
- Heating Mode
- Ventilation Mode
- Dry Mode
- I-Feel
- Turbo Mode
- Hot Start
- Vertical SWING
- Horizontal SWING
- +8°C Mode
- Sleep Mode
- Quiet Mode

			CH-S09FTXAL2-*(I)	CH-S12FTXAL2-*(I)	CH-S18FTXAL2-*(I)	CH-S24FTXAL2-*(I)
Capacity	Cooling	kW	2.70 (0.45-3.50)	3.50 (0.70-4.00)	5.30 (1.26-6.60)	7.10 (2.00-8.32)
	Heating	kW	3.00 (0.45-4.20)	3.81 (0.80-4.50)	5.60 (1.12-6.80)	7.80 (2.00-9.20)
Power supply			-220-240 V/50 Hz/1 Ph			
Liquid pipe diameter	mm/inch		6.35/1/4"	6.35/1/4"	6.35/1/4"	6.35/1/4"
Gas pipe diameter	mm/inch		9.52/3/8"	9.52/3/8"	12.7/1/2"	15.88/5/8"
Air flow rate	m³/h		390/420/450/490/540/590/660	390/420/450/490/540/590/680	306/520/580/610/750/800/850	750/850/900/950/1000/1100/1250
Sound level pressure	dB (A)		18/22/26/35/37/39/41	19/24/28/35/37/39/43	30/33/36/41/43/45/49	32/35/38/42/44/47/49
Drying	l/h		0.8	1.4	1.8	2.4
Weight	kg		10.5	10.5	13	16

	W (mm)	H (mm)	D (mm)
CH-S09FTXAL2-*(I)	865	290	210
CH-S12FTXAL2-*(I)	865	290	210
CH-S18FTXAL2-*(I)	996	301	225
CH-S24FTXAL2-*(I)	1101	327	249

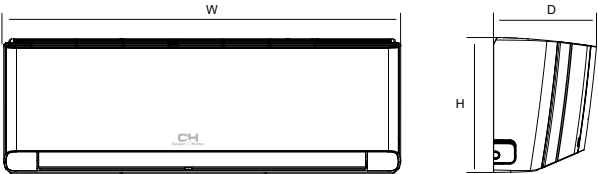

* Unit can be dispatched in four various colours: white (WP), full black (FB), silver (SC), gold (GD)