


DEHUMIDIFIER

WITH GLASS
DESIGN PANEL

- ▶ Thanks to improved sound insulation and a DC fan motor, the dehumidifier operates extremely quietly (44-46 dB(A)). This allows the unit to be installed in any room.
- ▶ The dehumidifier creates a warm and comfortable air flow.
- ▶ The heat exchanger is coated with a special golden epoxy resin, a coating with exceptional anti-corrosion properties. This allows for extended service life in rooms with high relative humidity.
- ▶ Modern and sophisticated body design. C&H dehumidifiers for swimming pools are available in two versions, white and black gloss.



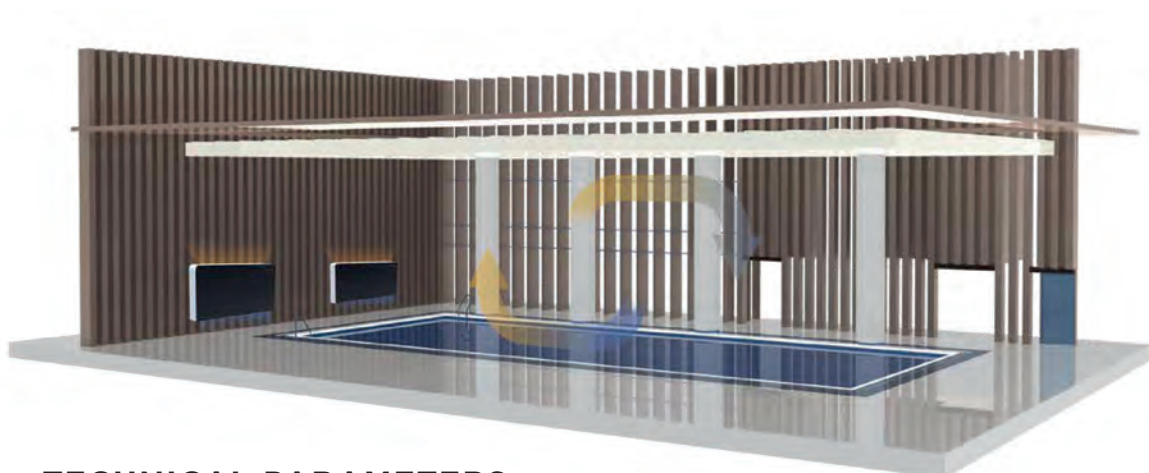

TECHNICAL PARAMETERS

		CH-D22RK (B)	CH-D35RK (B)	CH-D45RK (B)
Dehumidification capacity	l/h	2.2	3.5	4.5
Dehumidification capacity per day	l	53	84	108
Pool surface	m ²	10	15	20
Noise level	dB(A)	44	46	48
Power supply		-220-240V/50 Hz/1Ph		
Power input	kW	0.892	1.095	1.95
Current input	A	4.0	5.0	8.0
Range of relative humidity	%	40-90	40-90	40-90
Operating temperature range	°C	10 – 36 °C		
Dimensions (LxWxH)	mm	1295x202x647	1495x202x647	1695x202x647
Refrigerant		R32		
Drain pipe	mm	16	16	16

OVERALL DIMENSIONS

