



FOUR-WAY CASSETTE TYPE FAN COIL UNIT

- ▶ Chilled water/Hot water (2 pipes)
- ▶ Low height for easy installation
- ▶ Low noise fan direct driven by single phase, 3 speed permanent split capacitor motor.
- ▶ Copper tube/aluminum fin coils
- ▶ Hydrophilic aluminum fin coils coated (optional)
- ▶ Unit constructed by electrostatic galvanized sheet, providing maximum protection against corrosion
- ▶ Heavy gauge zinc coated steel drainage pan with good insulation processing, avoiding sweating and corrosion Mesh filter in regenerable polypropylene.



Model		CH-FC030K2	CH-FC040K2	CH-FC050K2	CH-FC060K2	CH-FC075K2	CH-FC085K2	CH-FC100K2	CH-FC120K2	CH-FC150K2
Cooling capacity (W)		3000	3700	4500	5700	7000	7270	8220	10390	12900
Heating capacity(W)		4000	5100	6000	9660	11550	12420	13850	17580	17600
Air flow (m³/h)	H	510	680	850	1000	1250	1400	1600	2000	2550
	M	440	580	730	850	1060	1190	1360	1700	2170
	L	360	480	600	720	900	1010	1150	1440	1840
Sound pressure(dB (A))		36	42	45	45	46	47	48	49	50
Rated input (W)		35	60	75	120	125	145	150	185	185
Weight (kg)	Indoor unit	17.5			25		30.5			35
	Panel	3			6					
Power supply		~ 220-240 V/50 Hz/1 Ph								

CH-FC030K2, CH-FC040K2, CH-FC050K2

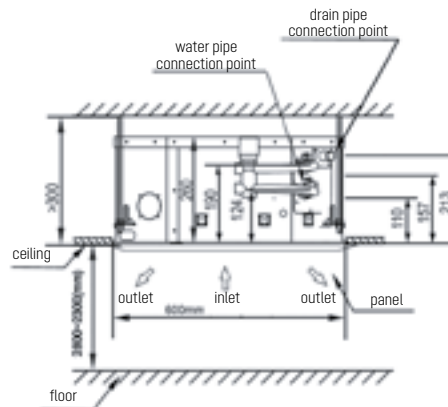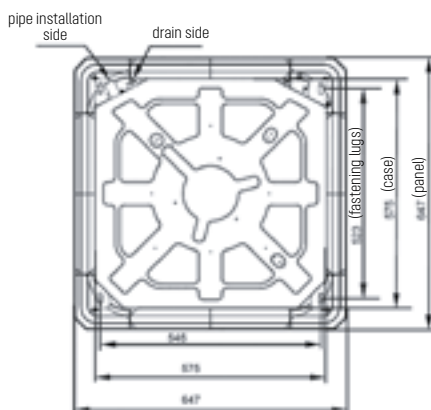

CH-FC060K2, CH-FC075K2, CH-FC085K2, CH-FC100K2, CH-FC120K2, CH-FC150K2

